

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
20 January 2005 (20.01.2005)

PCT

(10) International Publication Number
WO 2005/006025 A2

- (51) International Patent Classification⁷: **G02B**
- (21) International Application Number:
PCT/US2004/019642
- (22) International Filing Date: 18 June 2004 (18.06.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/483,746 30 June 2003 (30.06.2003) US
10/810,000 26 March 2004 (26.03.2004) US
- (71) Applicant (for all designated States except US):
GRAPHIC SECURITY SYSTEMS CORPORATION [US/US]; 4450 Jog Road, Lake Worth, FL 33467 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **ALASIA, Alfred, V.** [US/US]; 9720 Pine Mill Court, Lake Worth, FL 33467 (US). **ALASIA, Alfred, J.** [US/US]; 283 Cypress Trace, Royal Palm Beach, FL 33411 (US). **ALASIA, Thomas, C.** [US/US]; 3674 Woods Walk Blvd., Lake Worth, FL 33467 (US).
- (74) Agents: **MARTINEZ DE ANDINO, J., Michael et al.**; Hunton & Williams, Riverfront Plaza, East Tower, 951 East Byrd Street, Richmond, VA 23219-4074 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ILLUMINATED DECODER

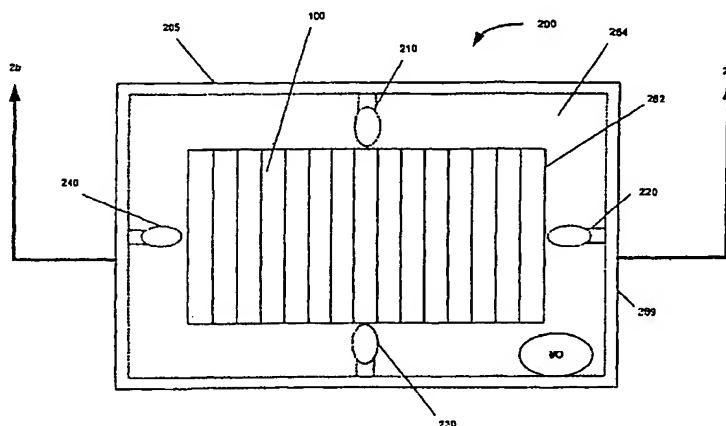

(57) Abstract: An illuminated decoder is disclosed. The illuminated decoder is useful determining genuine items from counterfeit items by decoding encoded images printed on genuine items to reveal an authentication image in low light situations. The illuminated decoder includes housing, a lens configured for optically decoding encoded images, and at least one light source attached to the housing.

WO 2005/006025 A2

WO 2005/006025

PCT/US2004/019642

ILLUMINATED DECODER

Background of the Invention

[0001] Various methods have been proposed for protecting goods and documents from counterfeit protection. Some such methods include creating images which may be embedded and/or concealed as encoded, hidden images. The images cannot easily be seen, if at all, without the use of a special device to decode, or reveal, an authentication image when placed over the location of the encoded image. When a decoder is placed over a branded good, for example, at a location where an authentic product is known to contain an encoded image, a party may be able to verify the good's authenticity by whether or not the authentication image is revealed when one views the location through the decoder.

[0002] In many cases, a party interested in investigating whether or not a product or document is authentic may be conducting the investigation in a low light situation, such as a warehouse or shipyard where goods are often subject to inspection. Similarly, a police officer may want to determine the authenticity of a driver's license during a night time traffic stop along a dimly lit street. These low light situations can make authentication difficult.

Summary of the Invention

[0003] Accordingly, it is desirable to have a decoder device that illuminates an encoded image for viewing when ambient light is low and viewing an encoded image through the decoder may be difficult without an additional light source.

[0004] An illustrative embodiment of the invention provides an illuminated decoder that comprises a housing, a lens attached to the housing, the lens being configured for optically decoding an encoded image viewable therethrough, and at least one light source attached to the housing to illuminate a surface containing the encoded image so that when the illuminated decoder is positioned to overlie the surface, the encoded image printed on the surface may be viewed through and decoded by the lens to reveal an authentication image.

Brief Description of the Drawings

[0005] Figure 1 shows a lenticular lens for use with an illuminated decoder in accordance with an exemplary embodiment of the invention.

[0006] Figure 2a is a top view of an illuminated decoder according to one exemplary embodiment of the invention.

[0007] Figure 2b is a cross-sectional view of the illuminated decoder of Figure 2a.

WO 2005/006025

PCT/US2004/019642

[0008] Figure 3a is a top view of an illuminated decoder according to one exemplary embodiment of the invention.

[0009] Figure 3b is a cross-sectional view of the illuminated decoder of Figure 3a.

[0010] Figure 4a is a perspective view of an illuminated decoder according to another exemplary embodiment of the invention.

[0011] Figure 4b is a cross-sectional view of the illuminated decoder of Figure 4a.

[0012] Figure 5 is a perspective view of an illuminated decoder according to another exemplary embodiment of the invention.

[0013] Figure 6a is a perspective view of an illuminated decoder according yet another exemplary embodiment of the invention.

[0014] Figure 6b is a cross-sectional view of the illuminated decoder of Figure 6a.

Detailed Description of Exemplary Embodiments

[0015] Exemplary embodiments of the invention are directed to providing an illuminated decoder that can be used to decode encoded images in low light situations, when ambient light alone may be insufficient to reveal the encoded image as an authentication image. The illuminated decoder comprises a housing, a lens capable of decoding encoded images and a light source associated with the lens.

[0016] As used herein, the term "encoded image" refers to an authentication image printed in rasterized, scrambled or other manipulated form, such that when embedded and/or concealed in a document or in another printed background or source image, the authentication image cannot be discerned from the base document material or other background or source image without the use of an optical decoding device. An encoded image may be generated from an authentication image using a particular set of characteristics that include encoding parameters corresponding to certain optical characteristics of the decoding device. When the encoded image is printed, placement of the decoding device over the printed encoded image in a predetermined orientation reveals the authentication image. Without the decoding device, some or all of the encoded image may be visible, but the authentication image is indecipherable or indistinguishable from the background by the naked eye. In other cases, the presence of encoded image may also be indecipherable or indistinguishable from the background by the naked eye.

PCT/US2004/019642

[0022] In low light situations, decoding encoded images may be made more difficult by the lack of ambient light. This may result in increased difficulty in determining whether an

PCT/US2004/019642

[0026] Any type of lens having optical characteristics matching the encoded image can be used with exemplary embodiments of the present invention. For example, the lens may be a lenticular lens that has a single set of regularly spaced curvatures as shown in Figure 1 or the

PCT/US2004/019642

[0029] Thus, a lens with a particular lens frequency can be used to decode encoded images with a matching line frequency, such as, by way of example only, by customs agents or private investigators verifying whether certain branded goods are genuine or counterfeit. For a particular branded good, the good's producer may know that it prints encoded images having a particular line frequency onto its product packaging. The producer may assign agents to attempt to decode encoded images on products bearing the brand of the producer using a lens that has a lens frequency corresponding to the line frequency of the encoded image for the product under investigation. If an encoded image is present and thus an authentication image is revealed when the good is viewed through the decoder, the goods' authenticity is verified, while if an image is not present, the goods have been identified as a likely counterfeit.

WO 2005/006025

PCT/US2004/019642

[0030] Often, these investigations may be conducted in environments where ambient light is low, for example, in dimly lit warehouses. In low light situations, it may be difficult to determine whether or not an encoded image is present by viewing through the lens without an additional source of light. By using illuminated decoders in accordance with exemplary embodiments of the invention, the additional light source needed to more clearly determine whether an encoded image is present is conveniently provided, providing a faster and more accurate determination of whether an item is genuine.

[0031] Furthermore, using a light source to illuminate the encoded image may improve the overall clarity of the authentication image revealed to a person viewing the image versus one viewing the image through a decoder using only ambient light, even when ambient light is relatively intense.

[0032] In order to better view encoded images in low light situations, at least one light source may be associated with the lens, providing an illuminated decoder that casts light onto a surface below the decoder, providing sufficient light to make any encoded image printed thereon viewable. The light source may be any light source, such as one or more light bulbs or light emitting diodes (LEDs) for example.

[0033] The light source is associated with the lens to create a single unit, typically through the use of a housing or overlay that attaches to both the light source and the lens. In certain exemplary embodiments, the lens, the light source or both, may be contained within the housing. Unlike the lens, which is substantially transparent in order to view through the lens, the housing is at least translucent, and preferably opaque to keep light from entering or exiting the housing except through apertures designed to permit a viewer to see through the lens. The housing may be manufactured from various materials, but typically comprises one or more injection molded rigid, plastic pieces.

[0034] An exemplary embodiment of an illuminated decoder is shown in Figures 2a and 2b. The illuminated decoder 200 comprises a housing 205, and a lenticular lens 100 and light sources 210-240 attached to the housing 205. The housing 205 may also contain a battery (not shown) or other power source connected to the light sources. The light sources 210-240 are attached to the interior of side walls 269 of the housing 205 in a plane orthogonal to the lens 100, although they need not be so oriented.

[0035] Figure 2b shows a cross-sectional view of the illuminated decoder of Figure 2a. The housing 205 includes a top wall 264 and a bottom wall 266, along with four side walls

WO 2005/006025

PCT/US2004/019642

269. The top wall 264 contains a top aperture 262, while the bottom wall 266 contains a bottom aperture 268, the bottom aperture 268 is sized and configured to accept the lens 100. The two apertures 262, 268 are in registration with one another such that the lens 100 is viewable through the top aperture 262 and a person using the illuminated decoder 200 can see through the lens 100 to a surface below. The lens 100 may be attached to the housing 205 using an adhesive, a friction connection, or in some other manner.

[0036] The housing 205 has a top wall 264 surrounding the top aperture 262 that acts as a shield so that the light sources 210-240 are partially or fully shielded from the eyes of a person viewing through the illuminated decoder 200 positioned over an encoded image. The top wall 264 or side walls 269 may be configured to direct light toward the bottom aperture 268, such as by a reflective coating applied to an interior surface of the top wall 264 or by modifying the angle of the interior side walls as shown in Figure 3a and 3b.

[0037] Figures 3a and 3b illustrate another exemplary embodiment in which the interior side walls 269 are angled to direct light from the light sources 210-240 toward the bottom aperture 268. Figure 3b also shows that in certain embodiments, the lens 100 may be contained entirely within the housing 205, the bottom wall 266 supporting the lens 100 above the bottom aperture 268.

[0038] An exemplary embodiment of another illuminated decoder is shown in Figures 4a and 4b. Figure 4a is a perspective view of an illuminated decoder 300 having light sources attached to a housing 305 above a lenticular lens 100. The housing 305 is mounted over the lens 100. The housing 305 has a top wall 364 and four side walls 369. It should be appreciated that in this and other embodiments, the number of side walls 369 may be greater or fewer than four depending on the desired geometry of the illuminated decoder 300.

[0039] A cross-sectional view of the illuminated decoder of Figure 4a is shown in Figure 4b. As shown in Figure 4b, the housing 305 has an open bottom. In this exemplary embodiment, the housing 305 is attached to the lens 100 such that the lens 100 forms a bottom wall of the illuminated decoder 300. Multiple light sources 310-350 are attached to the top wall of the housing 305 opposite the lens 100 and configured to shine therethrough.

[0040] As shown in Figures 4a and 4b, when the light sources 310-350 are opposite the lens 100, it may be advantageous to have a side aperture 370 in one of the sidewalls 369 of the housing 305. Although the aperture 370 is shown in a plane orthogonal to the plane of

WO 2005/006025

PCT/US2004/019642

the lens 100, the aperture 370 need not be so arranged, and may be configured at angle, as shown in Figure 5 for example.

[0041] Figure 5 shows an exemplary embodiment of an illuminated decoder 500 that is in many respects similar to the illuminated decoder 300 of Figures 4a and 4b. However, in Figure 5, the illuminated decoder has an angled side wall 569 containing a side aperture 370 for viewing through the illuminated decoder to a surface beneath the lens 100.

[0042] As described with respect to other exemplary embodiments of the invention, in embodiments where a side wall includes a side aperture, the side aperture may be positioned such that the side wall shields a viewer's eyes from directly viewing the light source when the viewer looks through the illuminated decoder at a surface containing an encoded image. Accordingly, the side aperture is preferably placed at a distance from the top wall that conceals the light sources from direct view.

[0043] Often, a lens used to decode encoded images may first need to be rotated to a correct orientation to reveal the authentication image. In some cases, it may not be possible for a user inspecting a good or document to rotate the decoder and still easily see through the illuminated decoder, for example, when using an exemplary embodiment of an illuminated decoder having a single side aperture. As the illuminated decoder is rotated, a user would either have to move along with the decoder to continue viewing through the side aperture, or rotate the item being viewed so that the illuminated decoder, and thus the side aperture, is held in place.

[0044] In certain situations, such as inspecting goods in a warehouse, either or both the user and the item under inspection may have limited mobility. To alleviate this problem, two or more top or side apertures may be used, such that the illuminated decoder can be viewed through from more than one direction. Alternatively, yet another embodiment of illuminated decoder, as shown in Figures 6a and 6b, may conveniently be used. In this embodiment, the illuminated decoder further comprises one or mirrors to reflect the image seen when viewing through the decoder and the decoder can be rotated to direct the reflected image toward a viewer's eyes.

[0045] Figure 6a shows an illuminated decoder 400 that has a housing 405 that includes a top wall 464 and a side wall 469. The housing 405 comprises a top section 407 and a base section 409. A lens 100 is attached to the base section 409 to form a bottom wall of the illuminated decoder 400. A side aperture 470 is located in the side wall 469 of the top

WO 2005/006025

PCT/US2004/019642

section 407 of the housing 405. As shown in more detail in Figure 4b, the base section 409 and top section 407 are rotatably attached to one another, such as, for example, by a male/female connection 415. In this manner, the base section 409 and the lens 100 attached thereto can be manually rotated while the top section 407 is held in place.

[0046] A mirror 480 attached to the base section 409 is positioned to reflect light, and hence any authentication image, back through the viewing aperture 470 as the base section 409 and lens 100 are rotated over an encoded image. Depending on the dimensions of the housing 405, and the angle of the mirror 480, it may be necessary to use two or more mirrors to reflect light from the light sources 410-450 back through the side aperture 470 such that an authentication image can easily be viewed.

[0047] It should be appreciated that in certain embodiments, the illuminated decoder may be configured so that only the lens 100 rotates, while the entire housing 405 is held in place.

[0048] The light source used in various embodiments of the invention may produce any kind of light, including visible, infrared, or ultraviolet light.

[0049] It should be appreciated that the light from the light source used in the illuminated decoder must match the type of ink used to print the encoded image for an authentication image to be revealed. For example, various types of ink may be used to print encoded images, including those which can viewed in the visible light range only when first stimulated by non-visible light, such as infrared or ultraviolet light. If the ink used to print encoded images is the type of ink that can only be seen when exposed to infrared light, then the light source must contain light with an infrared component to make the encoded image appear in the visible light range while the decoder reveals the authentication image. Likewise, if the encoded image is printed with cyan ink, then the light must have a visible light component.

[0050] In embodiments where light from the light source is other than visible light, it may be particularly desirable to contain as much of that light within the housing as possible. Thus, it may also be desirable to exclude excess ambient light from entering the housing, while still including housing apertures for a person to view through the lens. Ambient visible light may have the effect of diluting the non-visible light from the light source, decreasing the visibility of the encoded image and hence, the revealed authentication image. This may be overcome, for example, by making the housing completely opaque and/or reducing the size of the housing apertures.

[0054] In addition to the type of light emitted from the light source, the type of light source itself can be varied. In many cases, the light source may be an LED, incandescent

WO 2005/006025

PCT/US2004/019642

bulb, fluorescent bulb, or halogen bulb. LEDs are preferred because they are typically of small size, but still produce a substantial amount of light versus the amount of power they consume.

[0055] Power can be delivered to the light source by any electrical power source, although battery power is preferred to make the illuminated decoder mobile, independent of its proximity to a stagnant power supply, such as an electrical outlet. The power source may be contained within a compartment of the housing of the illuminated decoder to hide it from view. The power supplied to the light source can be switched on or off using a switching device.

[0056] The present invention is not to be limited in scope by the specific embodiments described herein. Indeed, various modifications of the present invention, in addition to those described herein, will be apparent to those of ordinary skill in the art from the foregoing description and accompanying drawings. Thus, such modifications are intended to fall within the scope of the following appended claims. Further, although the present invention has been described herein in the context of a particular implementation in a particular environment for a particular purpose, those of ordinary skill in the art will recognize that its usefulness is not limited thereto and that the present invention can be beneficially implemented in any number of environments for any number of purposes.

WO 2005/006025

PCT/US2004/019642

What is claimed is:**1. An illuminated decoder comprising:****a housing;****a lens attached to the housing, the lens being configured for optically decoding an encoded image viewable therethrough; and****at least one light source attached to the housing to illuminate a surface containing the encoded image so that when the illuminated decoder is positioned to overlies the surface, the encoded image printed on the surface may be viewed through and decoded by the lens to reveal an authentication image.****2. The illuminated decoder of claim 1, wherein the housing comprises a top wall and at least one side wall, wherein at least one of the top wall or at least one side wall contains an aperture.****3. The illuminated decoder of claim 2, further comprising a bottom wall containing an aperture, wherein the bottom wall is configured to accept the lens.****4. The illuminated decoder of claim 3, wherein the top wall contains a top aperture for viewing the encoded image, the top aperture in a plane parallel to the lens.****5. The illuminated decoder of claim 2, wherein at least one side wall contains a side aperture for viewing the encoded image.****6. The illuminated decoder of claim 5, wherein the side aperture is in a plane orthogonal to the lens.****7. The illuminated decoder of claim 1, wherein the at least one light source emits light selected from the group consisting of infrared light, visible light and ultraviolet light.**

WO 2005/006025

PCT/US2004/019642

8. The illuminated decoder of claim 1, wherein the at least one light source comprises one or more devices selected from the group consisting of incandescent bulbs, fluorescent bulbs, light-emitting diodes, and halogen bulbs.
9. The illuminated decoder of claim 1, wherein the housing comprises a shield at least partially concealing the at least one light source from eyes of a person viewing through the lens.
10. The illuminated decoder of claim 1, wherein the at least one light source is attached to the housing in a position opposite the lens.
11. The illuminated decoder of claim 1, wherein the at least one light source is attached to the housing in a plane orthogonal to the lens.
12. The illuminated decoder of claim 1, further comprising at least one mirror attached to the housing.
13. The illuminated decoder of claim 1, wherein the lens is capable of being rotated.
14. The illuminated decoder of claim 13, wherein the housing comprises a top section and a base section, the lens attached to the base section of the housing, the base section rotatably attached to the top section.
15. The illuminated decoder of claim 1, wherein the lens is a lenticular lens.
16. The illuminated decoder of claim 1, wherein the lens is a multi-section lens.
17. The illuminated decoder of claim 1, wherein the lens has a lens frequency corresponding to a line frequency of the encoded image.
18. The illuminated decoder of claim 1, wherein the light sources are configured to direct light from the light source through the lens.

WO 2005/006025

PCT/US2004/019642

19. The illuminated decoder of claim 1, further comprising a light filter.

WO 2005/006025

PCT/US2004/019642

1/7


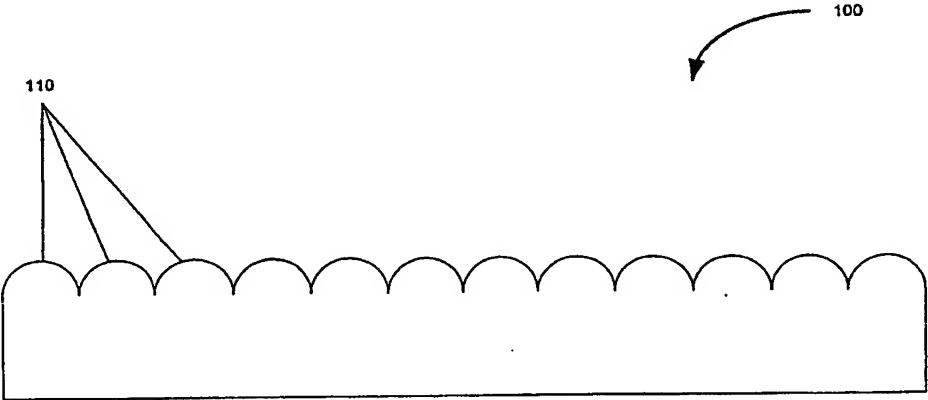


Figure 1

PCT/US2004/019642

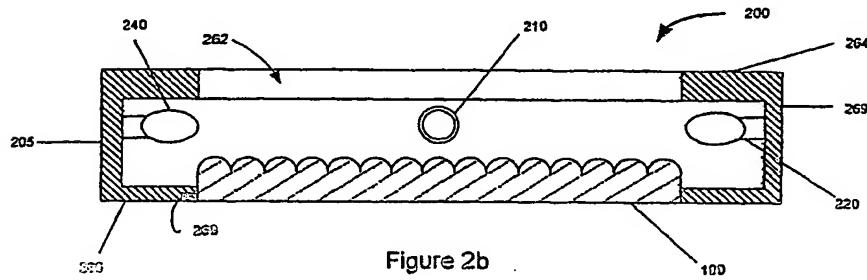

WO 2005/006025

PCT/US2004/019642

3/7

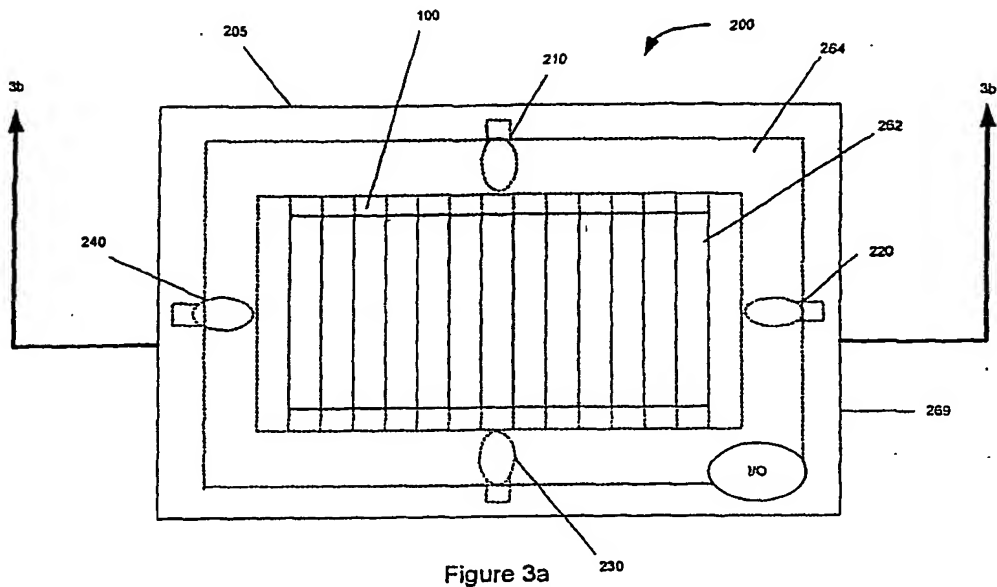


Figure 3a

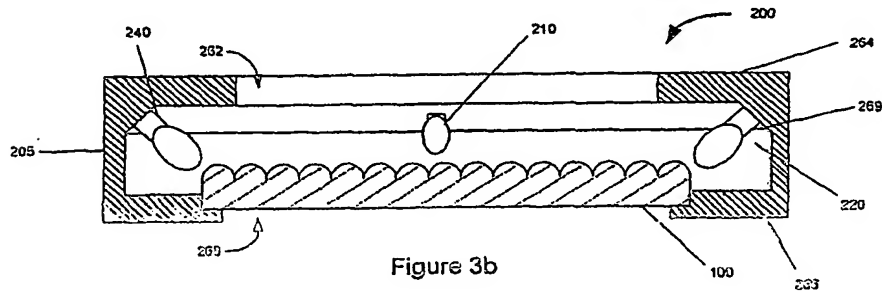


Figure 3b

WO 2005/006025

PCT/US2004/019642

4/7

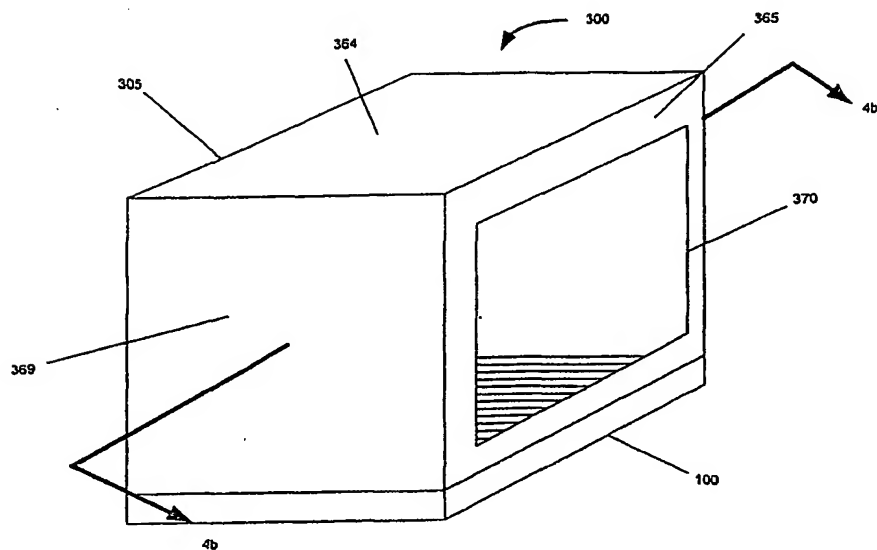


Figure 4a

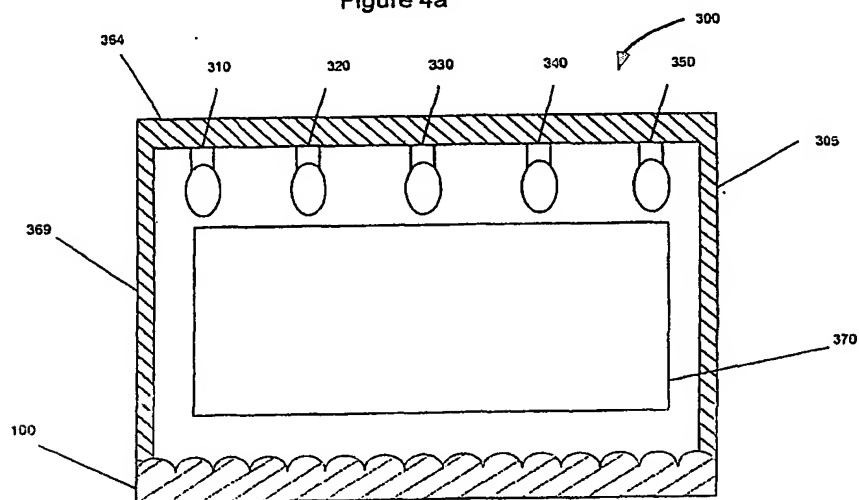


Figure 4b

WO 2005/006025

PCT/US2004/019642

5/7

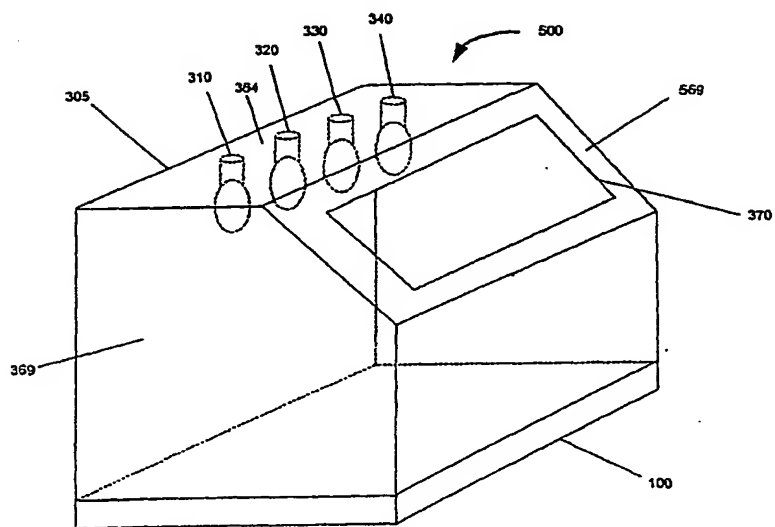


Figure 5

WO 2005/006025

PCT/US2004/019642

6/7

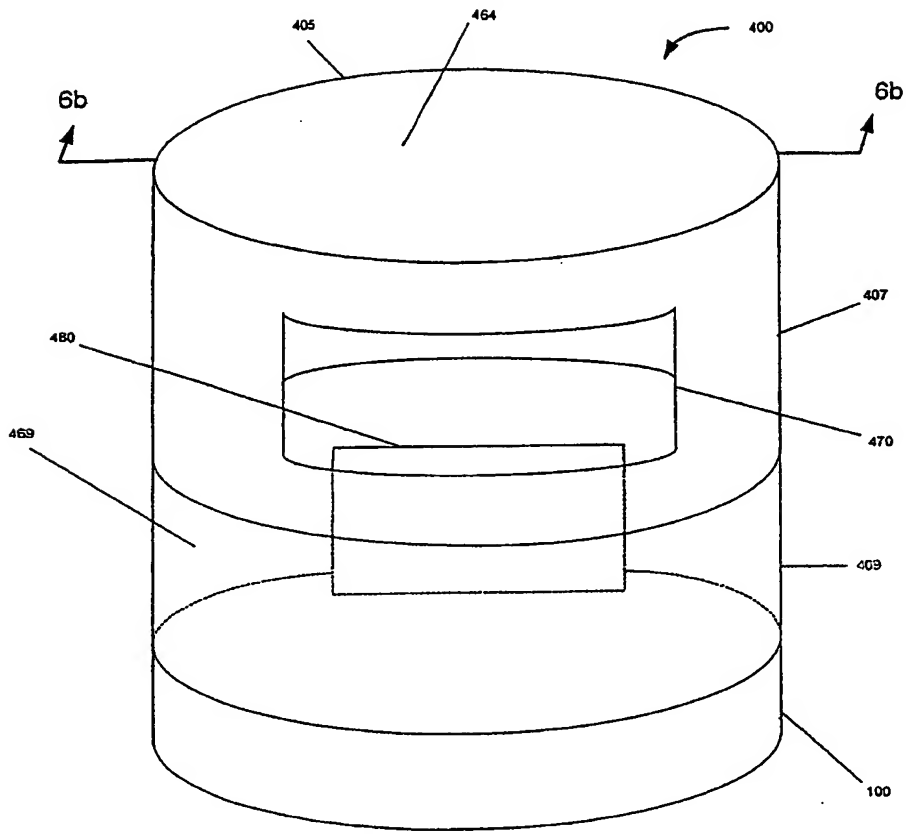


Figure 6a

WO 2005/006025

PCT/US2004/019642

7/7

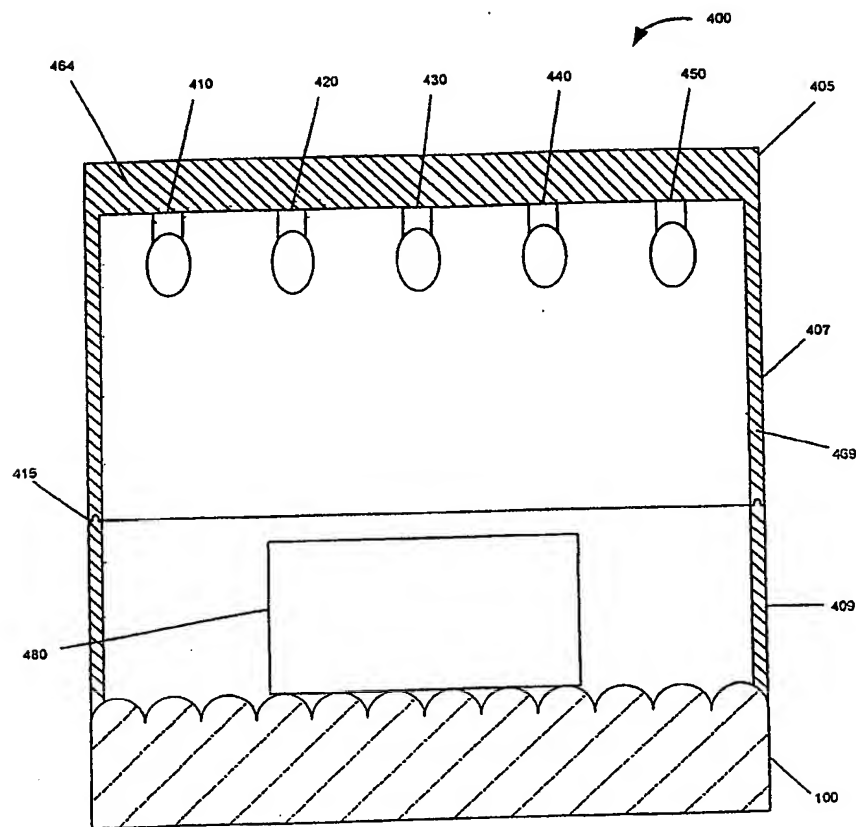


Figure 6b